



常州市嘉传电子有限公司

Changzhou Jiachuan Electronics Co., Ltd.

SPECIFICATION FOR APPROVAL

产品规格承认书

JC-BUZ6636-P02 无源蜂鸣器 / Passive Buzzer

Customer 客户	
Customer P/N 客户料号	
Supplier 供应商	常州市嘉传电子有限公司 Changzhou Jiachuan Electronics Co., Ltd.
Jiachuan P/N 嘉传型号	JC-BUZ6636-P02
Description 产品名称	无源蜂鸣器 / Passive Buzzer
Main Specification 主要规格	3/5V 3000Hz Min.70dB @10cm Ø6.7×H3.6mm
Issue Date 发行日期	2026-09-08
Revision 版本	A0

Approval / 签核

Prepared 制作	Checked 审核	Approved 批准	Company Seal 公司印章
李明珠	王敏娜	黄继桥	

Customer Confirmation / 客户确认

Signature / 签字 : _____ Date / 日期 : _____


PRODUCT SPECIFICATION / 产品规格内容

Model No.: JC-BUZ6636-P02

Date: 2026-09-08

Revision: A0

1. Mechanical Dimensions / 外形尺寸

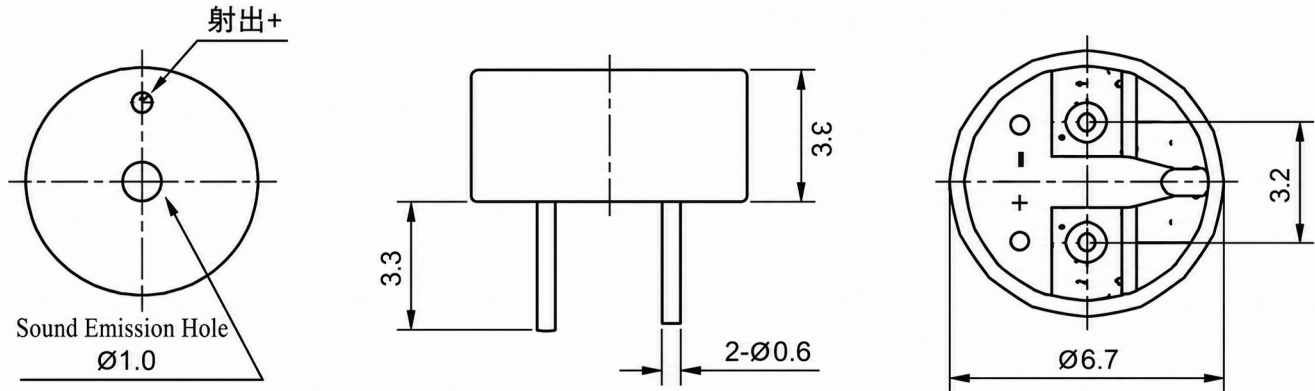

2. Electrical & Acoustic Specifications / 电气与声学规格

Item / 项目	Specification / 规格
Model No. / 原型号	GMC6636YB
Rated Voltage / 额定电压	3/5V
Operating Voltage / 工作电压	2.0~7.0V
Max. Rated Current / 最大额定电流	Max.150mA
Sound Pressure Level / 声压级	Min.70dB at 10cm / 3000Hz
Resonant Frequency / 谐振频率	3000Hz
Coil Resistance / 线圈电阻	16/42 $\pm$ 15% Ω
Operating Temperature / 工作温度	-20°C to +70°C
Storage Temperature / 储存温度	-30°C to +80°C
Case Material and Colour / 外壳材料及颜色	PPO / Black

3. Measuring Condition / 测量条件

Part shall be measured under a condition (Temperature: 5~35°C, Humidity: 45%~85% R.H., Atmospheric pressure: 860~1060 hPa) unless the standard condition (Temperature: 25 $\pm$ 3°C, Humidity: 60 $\pm$ 10% R.H., Atmospheric pressure: 860~1060 hPa) is regulated to measure.


4. Reliability Test / 可靠性试验

After any following tests, the part shall meet specifications without any degradation in appearance and performance except SPL. SPL shall not deviate more than -10 dB from the initial value.


1. Ordinary Temperature Life Test / 常温寿命试验	The part shall be subjected to 96 hours at 25±10°C. Input rated voltage. Resonant frequency, 1/2 duty square wave.
2. High Temperature Test / 高温试验	The part shall be capable of withstanding a storage temperature of +80°C for 96 hours.
3. Low Temperature Test / 低温试验	The part shall be capable of withstanding a storage temperature of -30°C for 96 hours.
4. Humidity Test / 湿热试验	Temperature: +40°C ±3°C; Relative Humidity: 90%–95%; Duration: 48 hours; then expose to room temperature for 6 hours.
5. Temperature Shock Test / 温度冲击试验	70°C / 1 hour → 25°C / 3 hours → -30°C / 1 hour → 25°C / 3 hours (1 cycle). Total cycle: 10 cycles.
6. Drop Test / 跌落试验	Standard packaging from 120 mm (drop on hard wood or board of 5 cm thick, three sides, six planes).
7. Vibration Test / 振动试验	Vibration: 1000 cycles/min. Amplitude: 1.5 mm. Duration: 1 hour in each 3 axes.

Note / 注意 : As this product is not protected from foreign material entering, please make sure that any foreign materials (e.g. magnetic powder, washing solvent, flux, corrosive gas) do not enter this product in your production processes. The functional degradation (e.g. SPL down) may occur if foreign material enters it.

5. Electrical and Acoustical Measuring Condition / 电气与声学测试条件

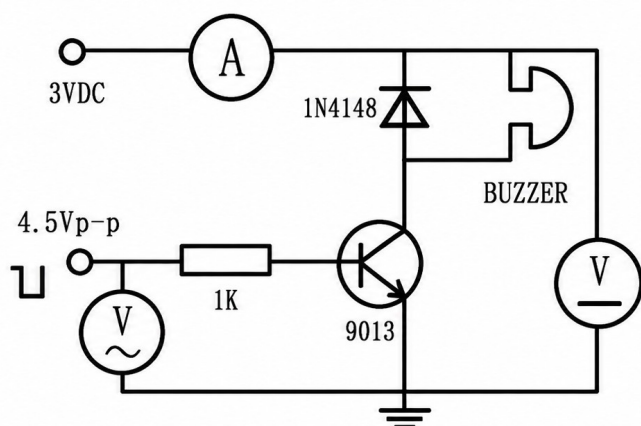

Test Circuit

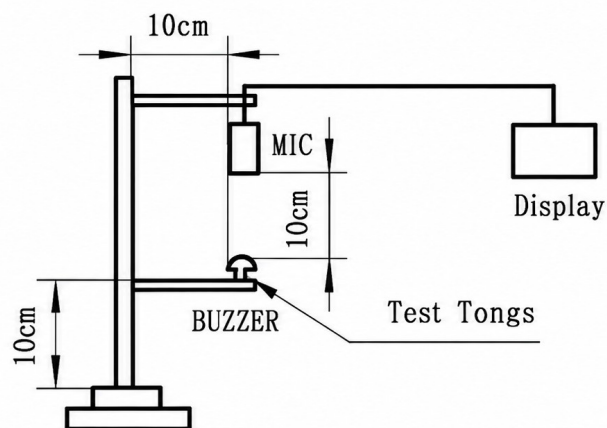

Test Equips

6. Packing Requirement / 包装要求

按客户要求包装。 / Packaging according to customer requirements.